



## WATERPROOFING, PROTECTING, REPAIRING & FLOORING SYSTEMS

Premium liquid-applied systems, based on high-quality polyurethane resins for building construction and renovation. Solutions designed to be easy to apply by specialists, craftspeople and end users.



**WATERPROOFING**



**Roofs, terraces and balconies**



**Foundations and retaining walls**



**Water tanks**



**Wet areas**



**PROTECTING & REPAIRING**



**Pool coatings**



**Varnishes**



**Facades treatment**



**FLOORING**



**Car parks**



**Industrial / non-residential flooring**




**ADVANTAGES OF PU SYSTEMS**



# SUSTAINABLE WATERPROOFING SYSTEMS FOR FLAT ROOFS AND TERRACES

## Cool Roof

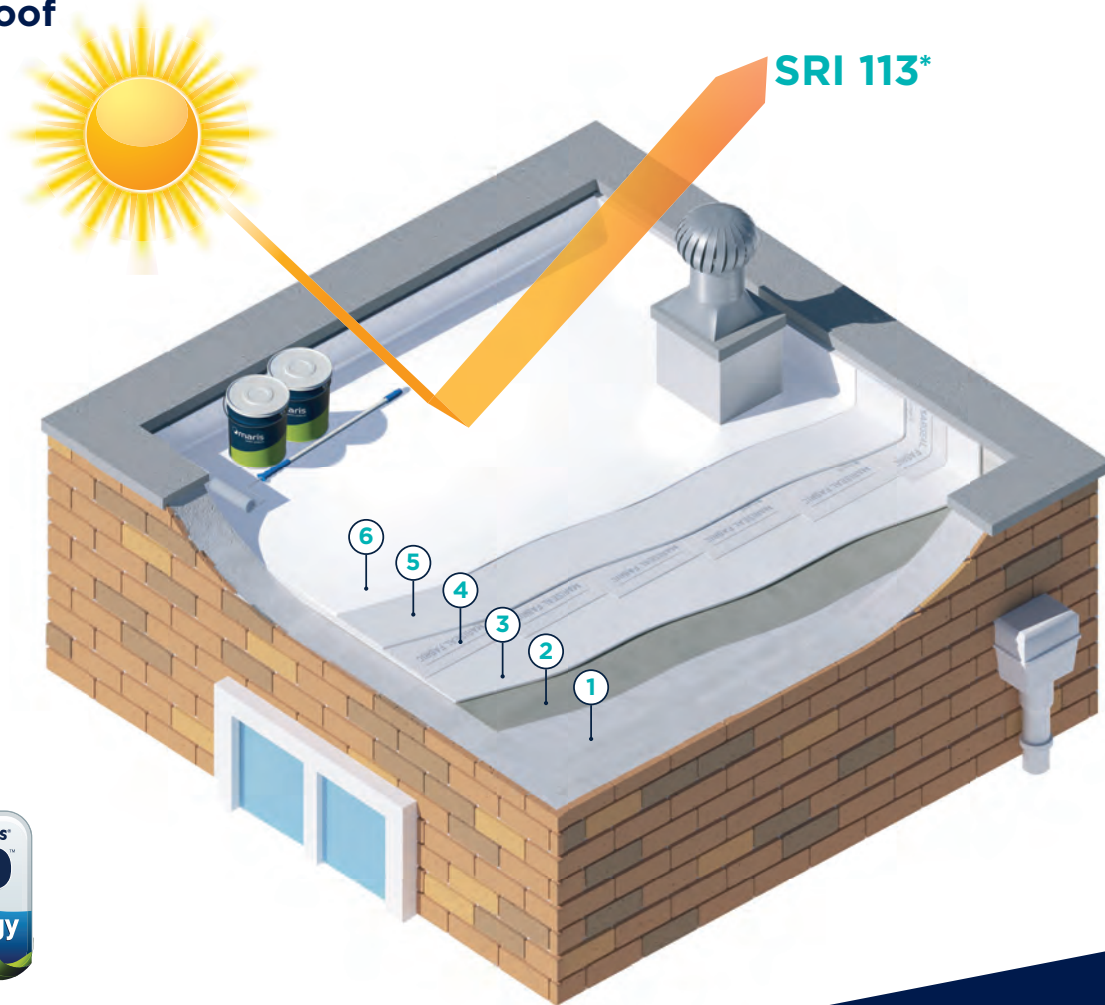

Premium, liquid-applied, water-based, 100% polyurethane waterproofing system, with excellent mechanical, chemical and UV resistance properties.

Isocyanate-free, low-VOC content, environmental and applicator friendly, meeting the criteria of a Cool Roof system with high SRI values.

Used for the long-lasting waterproofing of roofs, terraces and balconies.

Certified with 25 years of expected working life.

- 1 SUBSTRATE
- 2 MARISEAL® AQUA PRIMER  
or MARISEAL® 710W
- 3 MARISEAL® 250W
- 4 MARISEAL® FABRIC
- 5 MARISEAL® 250W
- 6 MARISEAL® 400W WHITE



25 YEARS EXPECTED WORKING LIFE



HEAT & FROST RESISTANT



LOW VOC



ODOR-FREE



CERTIFIED



UV STABLE (PURE ALIPHATIC) MARISEAL 400W



UV RESISTANT



SPRAY APPLICATION



HIGH PEDESTRIAN TRAFFIC



WATER VAPOR PERMEABILITY



## SUSTAINABLE WATERPROOFING SYSTEMS FOR FLAT ROOFS AND TERRACES

### Green Roof

Waterproofing of Green Roofs with Mariseal 250. Test report with anti-root protection.

- 1 SUBSTRATE
- 2 MARISEAL® PRIMER
- 3 MARISEAL® 250
- 4 MARISEAL® FABRIC 110gr
- 5 MARISEAL® 250
- 6 DRAINAGE MEMBRANE
- 7 GRAVEL and GEOTEXTILE
- 8 SOIL and PLANTS



CERTIFIED



HEAT & FROST  
RESISTANT




WATER VAPOR  
PERMEABILITY



RESISTANT  
TO ROOT  
PENETRATION



# COMPLETE WATERPROOFING SYSTEM FOR FLAT ROOFS AND TERRACES

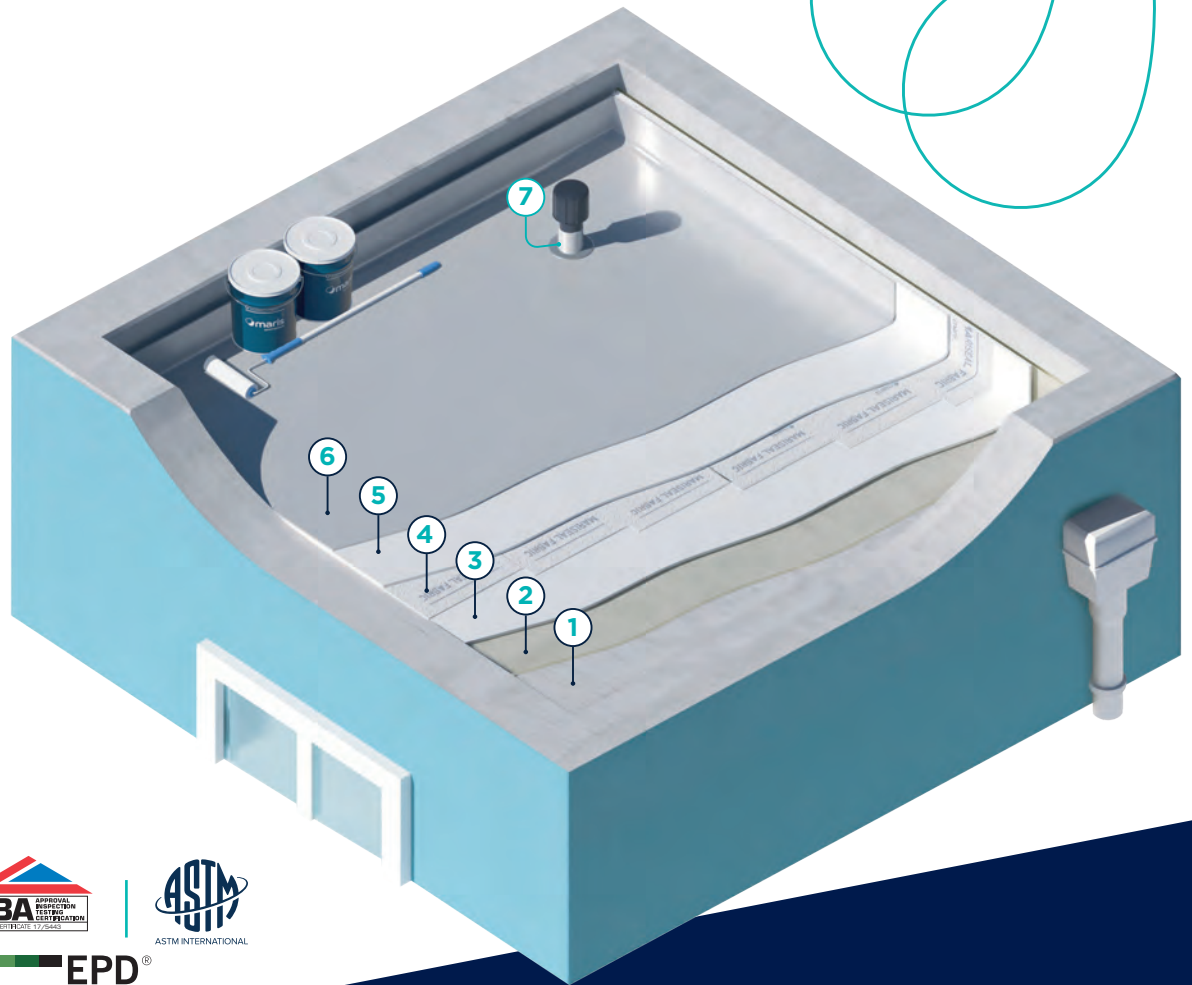

Premium, liquid-applied, solvent-based polyurethane waterproofing system, with excellent mechanical, chemical and UV resistance properties. Used for the long-lasting waterproofing of roofs, terraces and balconies. Certified with 25 years of expected working life.

## 1 SUBSTRATE

## 2 MARISEAL® PRIMER

## 3 MARISEAL® 250

## 4 MARISEAL® FABRIC

## 5 MARISEAL® 250

## 6 MARISEAL® 400

## 7 MARISEAL® DETAIL

## LEVELS OF USE CATEGORIES ACCORDING TO ETAG 005

Working life	W3
Climatic zone	M and S
Imposed loads	P1 to P4
Roof Slopes	S1 to S4
Lowest surface temperature	TL3-TL4
Highest surface temperature	TH4
Reaction to fire	Class E
Resistant to wind loads	>50 kPa



CERTIFIED



HEAT & FROST  
RESISTANT



HIGH  
PEDESTRIAN  
TRAFFIC



WATER VAPOR  
PERMEABILITY



SPRAY  
APPLICATION



25 YEARS EXPECTED  
WORKING LIFE



UV RESISTANT



UV STABLE  
(PURE ALIPHATIC)  
MARISEAL 400





TERRACE



BALCONY

# ALL-IN-ONE ALIPHATIC POLYURETHANE WATERPROOFING SOLUTIONS FOR FASTER APPLICATION AND LOWER TOTAL COST OF INSTALLATION ON FLAT ROOFS, TERRACES & BALCONIES

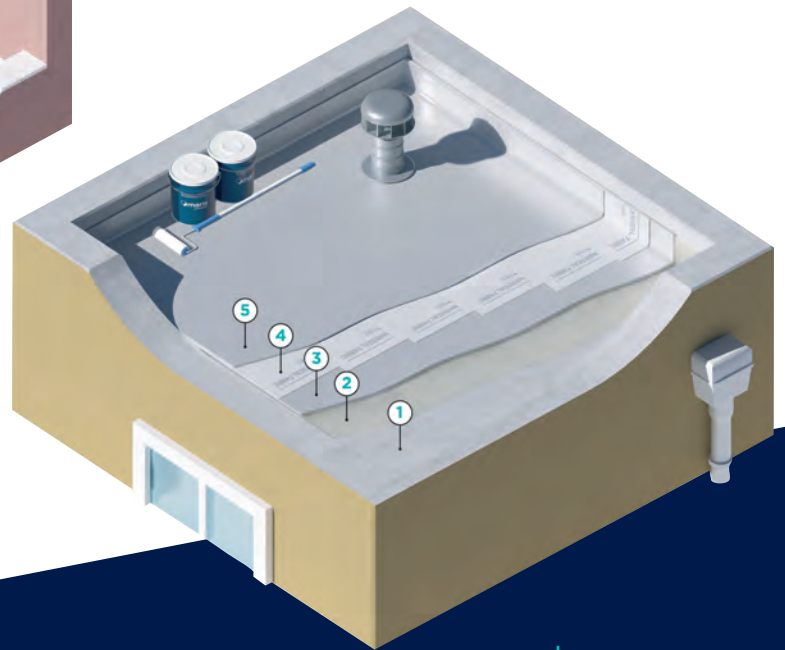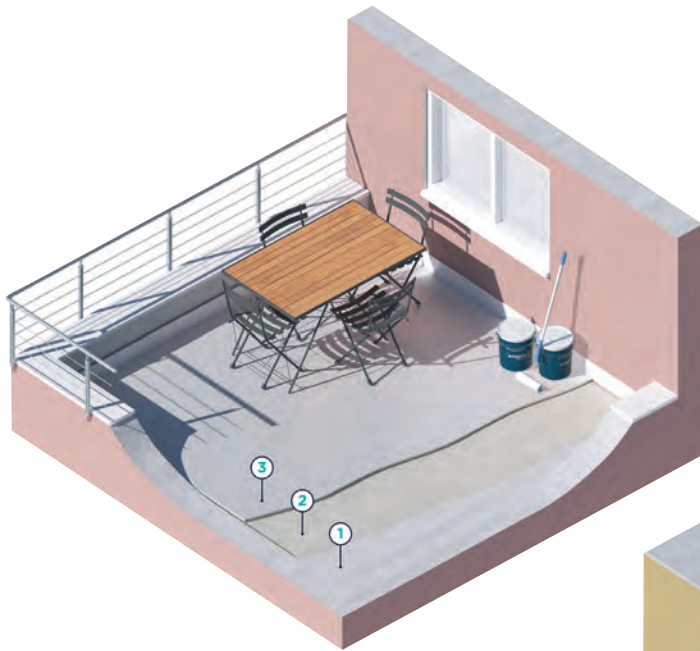

Aliphatic solvent-based polyurethane solution, membrane and top-coat all-in-one, used for the long-lasting waterproofing of balconies, terraces and verandas.


Offers exceptional UV stability and resistance to mechanical exposure with light pedestrian traffic.

## 1 SUBSTRATE

## 2 MARISEAL® PRIMER

## 3 MARISEAL® 450

\* MARISEAL® FABRIC (optional)

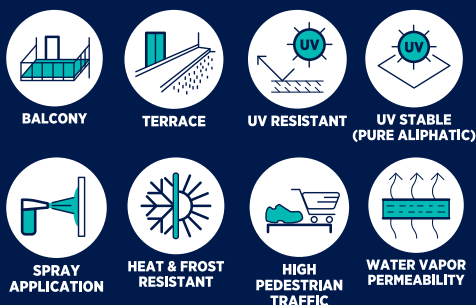

Aliphatic solvent-based polyurethane solution, membrane and top-coat all-in-one, used for the long-lasting waterproofing of roofs.

Excellent UV stability and yellowing resistance, containing a special catalyst that gives fast curing and defect-free membrane, even at thick layers.

## 1 SUBSTRATE

## 2 MARISEAL® PRIMER


## 3 MARISEAL® 460

4 MARISEAL® FABRIC (optional)

## 5 MARISEAL® 460



# TRANSPARENT WATERPROOFING OF BALCONIES AND TERRACES

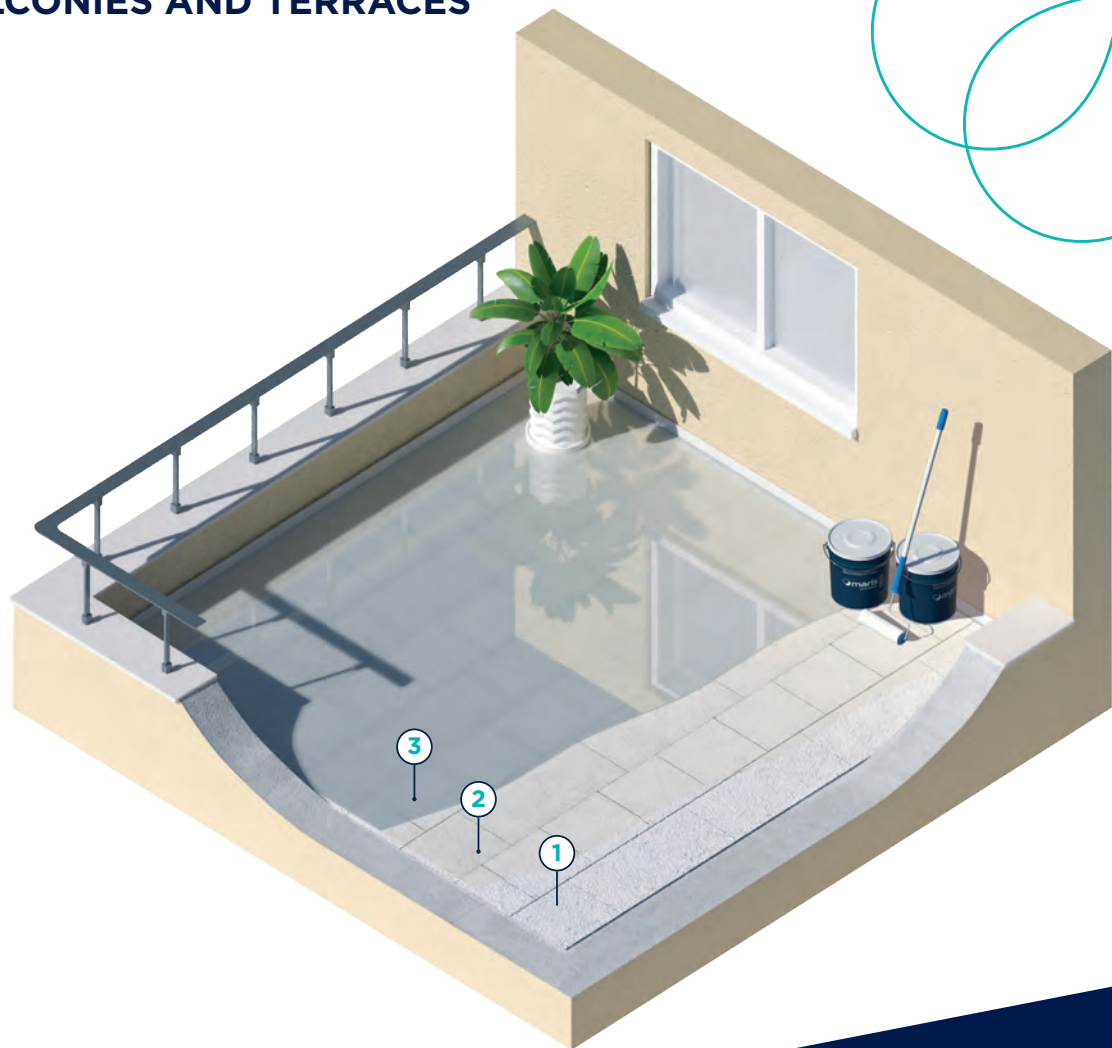

Transparent aliphatic polyurethane waterproofing system for balconies/terraces, ceramic and glass surfaces.

Creates a seamless, transparent, pedestrian traffic resistant membrane, that protects the substrate reliably and on a long term basis.

Also used as a transparent binder resin for sand carpet floor coating applications.

## 1 SUBSTRATE

## 2 MARITRANS® TILE PRIMER

## 3 MARITRANS®

## MARITRANS® FINISH

*(optional if matt effect is required)*



TRANSPARENT  
WATERPROOFING  
OVER TILES



GLOSSY FINISH



UV STABLE  
(PURE ALIPHATIC)



UV RESISTANT



BALCONY



TERRACE




HEAT & FROST  
RESISTANT



HIGH  
PEDESTRIAN  
TRAFFIC

# UNDER-TILE WATERPROOFING OF BALCONIES, TERRACES AND WET AREAS

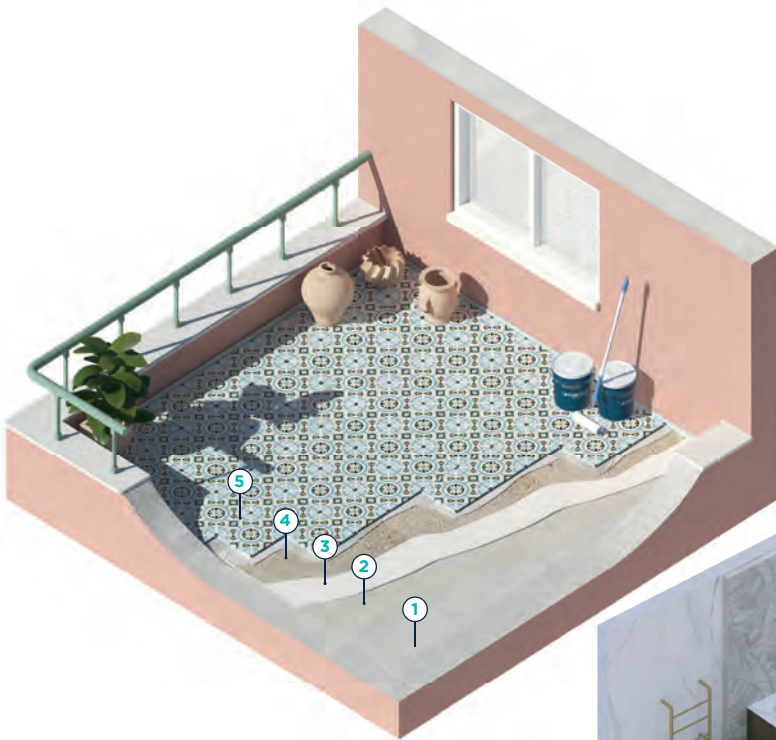

Liquid-applied, solvent-based polyurethane membrane for the long-lasting waterproofing of under-tile applications of roofs and balconies.

Liquid-applied, water-based hybrid polyurethane membrane, for the long-lasting waterproofing of under-tile applications in wet areas.

- 1 SUBSTRATE
- 2 MARISEAL® PRIMER
- 3 MARISEAL® 270
- 4 SILICA SAND 0,4 - 0,8mm
- 5 CERAMIC TILES  
adhered with elastic tile adhesive

- 1 SUBSTRATE
- 2 MARISEAL® 270W  
as PRIMER diluted with 15-20% with water
- 3 MARISEAL® 270W
- 4 CERAMIC TILES  
adhered with elastic tile adhesive C2



HEAT & FROST  
RESISTANT



WATER VAPOR  
PERMEABILITY



SPRAY  
APPLICATION



SAND  
SCATTERING



WATER-BASED



HEAT & FROST  
RESISTANT



WATER VAPOR  
PERMEABILITY



LOW VOC



ODOR-FREE


## WATER-BASED HYBRID PU RANGE FOR COST EFFECTIVE SOLUTIONS



Liquid-applied, highly permanent elastic, cold applied and cold curing, water-based, one component, hybrid polyurethane membranes used for long-lasting waterproofing of roofs and concrete constructions.



## COMPLETE WATERPROOFING SYSTEMS FOR FOUNDATIONS & RETAINING WALLS

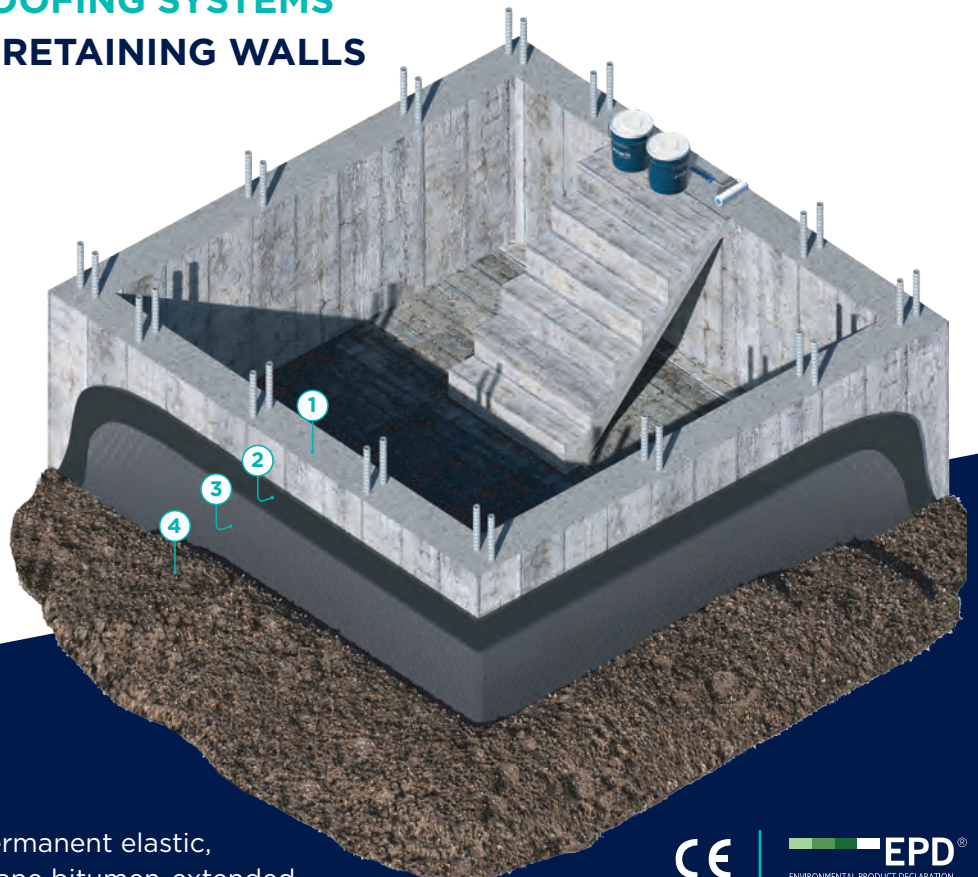

Liquid-applied, highly permanent elastic, solvent-based polyurethane bitumen-extended membranes, for the long-lasting waterproofing of foundations and retaining walls, with excellent crack-bridging properties.

- 1 SUBSTRATE
- 2 MARISEAL® 670 or MARISEAL® 600
- 3 DRAINAGE MEMBRANE
- 4 SOIL





FOUNDATIONS



RESISTANT  
TO ROOT  
PENETRATION

# PROTECTIVE POOL COATINGS AND WATER MANAGEMENT SYSTEMS

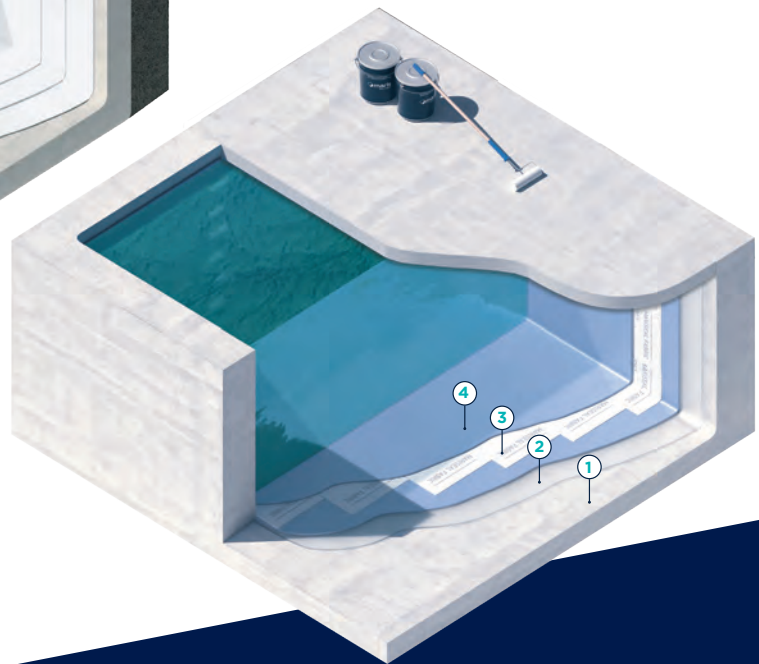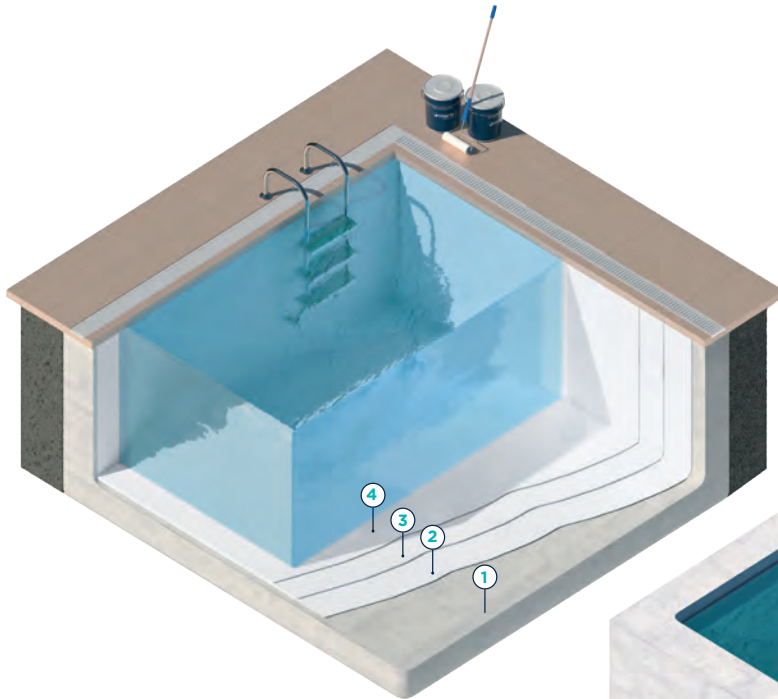

Colored, chemical & abrasion resistant, thin-layer protective pool coating.

Resistant to usual pool chemicals, UV & weather-stable, suitable also for exterior pools.

Used also in fountains, ponds and water channels.

No need of primer.

- 1 CONCRETE
- 2 MARIPOOL®
- 3 MARIPOOL®
- 4 MARIPOOL®

Solvent-free polyurethane membrane, used for long-lasting waterproofing and protection of drinking water tanks and reservoirs, drinking water supply channels, drinking water pipes and also under-tile on swimming pools.

- 1 SUBSTRATE
- 2 MARISEAL® 750
- 3 MARISEAL® 300
- 4 MARISEAL® FABRIC
- 5 MARISEAL® 300



ABRASION RESISTANT



CHEMICAL RESISTANT



UV STABLE (PURE ALIPHATIC)



HEAT & FROST RESISTANT



UV RESISTANT



SPRAY APPLICATION



SOLVENT FREE



LOW VOC



NSF CERTIFIED FOR DRINKING WATER



ODOR-FREE



HEAT & FROST RESISTANT




SAND SCATTERING



SPRAY APPLICATION

## INTERNAL OR EXTERNAL PU COATING SELF-LEVELLING PU SYSTEM

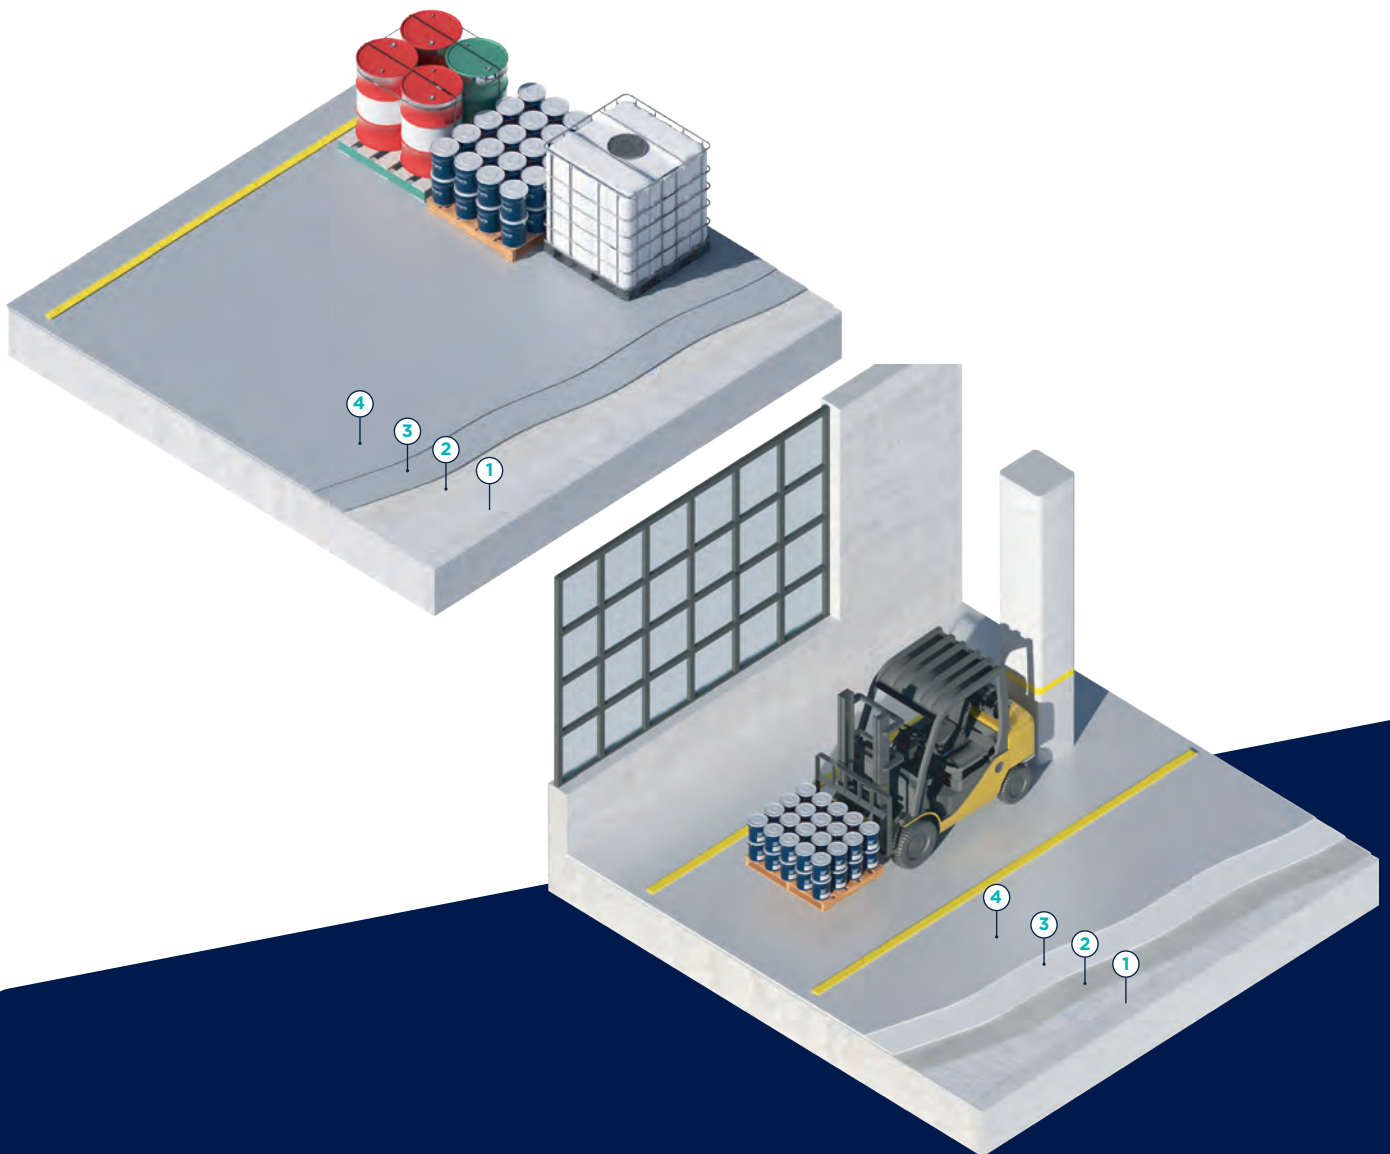

One-component, colored, highly durable, heavy duty polyurethane floor coatings, mainly used on concrete floors, on interior or exterior surfaces.

Specially designed for use as a thin-layer floor coating, providing high mechanical strength for applications such as car parking areas, storage rooms, warehouses or pedestrian decks.

- 1 SUBSTRATE**
- 2 MARIPUR® 7000**
- 3 MARIPUR® 7100 (internal)  
or MARIPUR® 7200 (external)**
- 4 MARIPUR® 7100 (internal)  
or MARIPUR® 7200 (external)**

Self-levelling, hard-elastic, polyurethane system, with high impact resistance, abrasion strength and very good resistance to acidic and basic solutions.

Mainly used in medium duty floor applications such as offices, show rooms, interior sports floors, warehouses.

- 1 SUBSTRATE**
- 2 MARIPOX® 2510**
- 3 MARICOAT® 2000**
- 4 MARIPUR® 7100 (internal)  
or MARIPUR® 7200 (external)**



**HEAVY TRAFFIC  
RESISTANT**



**CHEMICAL  
RESISTANT**



**SAND  
SCATTERING**



**TOOTHED TROWEL  
APPLICATION**



**HEAT & FROST  
RESISTANT**



**UV STABLE  
(PURE ALIPHATIC)  
MARIPUR 7200**



**SUITABLE FOR  
CAR PARKS**




## SELF-LEVELLING EPOXY COATING

Self-levelling, rigid, solvent-free, epoxy coating with high impact & abrasion strength and very good resistance to acidic and basic solutions.

Mainly used in heavy-duty industrial flooring applications.

- 1 SUBSTRATE
- 2 MARIPOX® 2510
- 3 MARIPOX® 2600

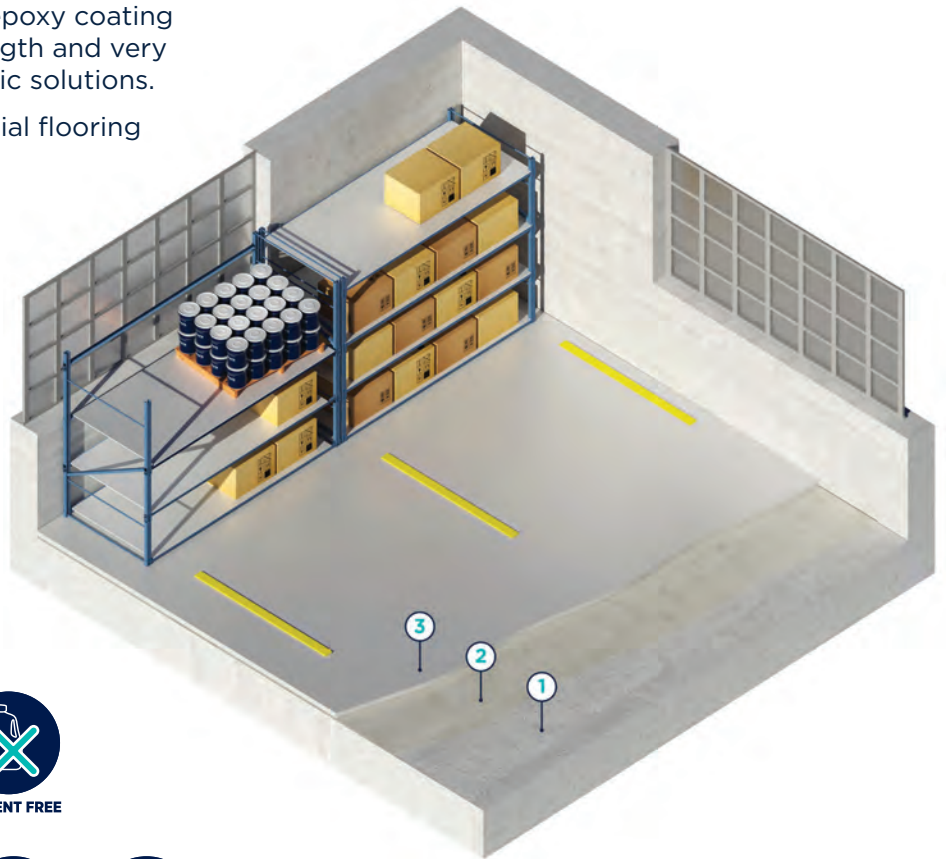

HEAVY TRAFFIC RESISTANT



SUITABLE FOR CAR PARKS



CHEMICAL RESISTANT



SOLVENT FREE



ODOR-FREE



SAND SCATTERING



TOOTHED TROWEL APPLICATION



LOW VOC




ABRASION RESISTANT

CE

EPD®  
ENVIRONMENTAL PRODUCT DECLARATION

## WATERPROOFING SYSTEM FOR CAR PARKS

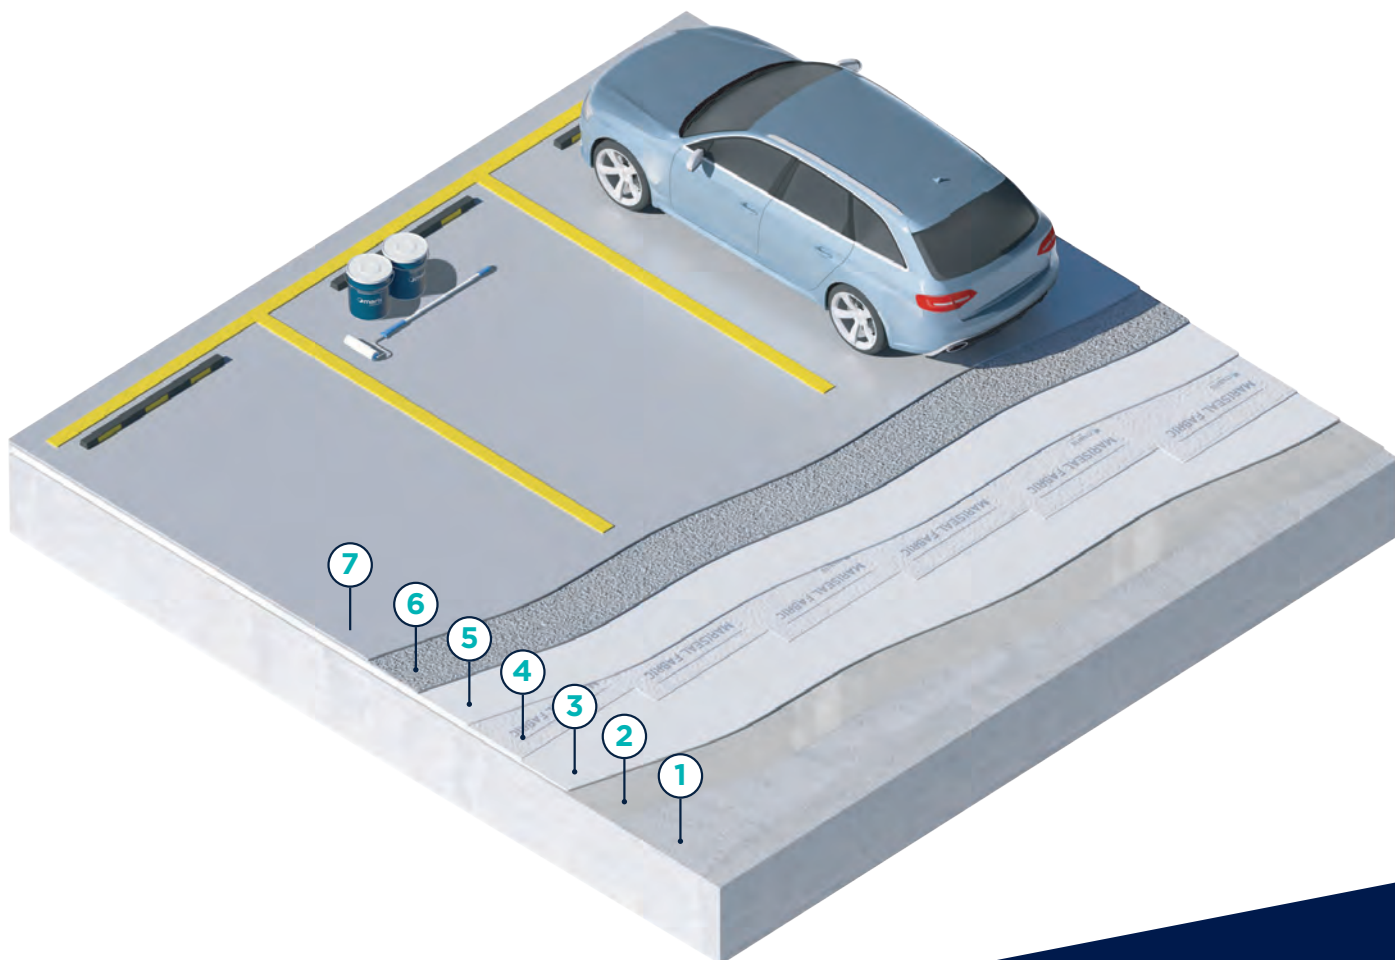

Solvent-based polyurethane waterproofing system, color/UV/weather-stable, subject to high wear and heavy traffic conditions, such as car parks.

- 1 SUBSTRATE
- 2 MARISEAL® PRIMER
- 3 MARISEAL® 250
- 4 MARISEAL® FABRIC 110gr
- 5 MARISEAL® 250
- 6 SILICA SAND
- 7 MARISEAL® 420



SUITABLE FOR  
CAR PARKS



UV STABLE  
(PURE ALIPHATIC)



SAND  
SCATTERING



HEAT & FROST  
RESISTANT



ABRASION  
RESISTANT



ENVIRONMENTAL PRODUCT DECLARATION



## PROTECTIVE COATING - FAÇADE TREATMENT

Transparent, deep penetrating, non-staining, non-yellowing, non-film-making, water repellent. Ideal for facades and walls of natural stones and decorative bricks.

- 1 SURFACE
- 2 MARISEAL® 800



HYDROPHOBIC



FOR NATURAL STONES



DEEP PENETRATING




NO CHANGE OF SURFACE APPEARANCE



NON FILM FORMING



WATER VAPOR PERMEABILITY

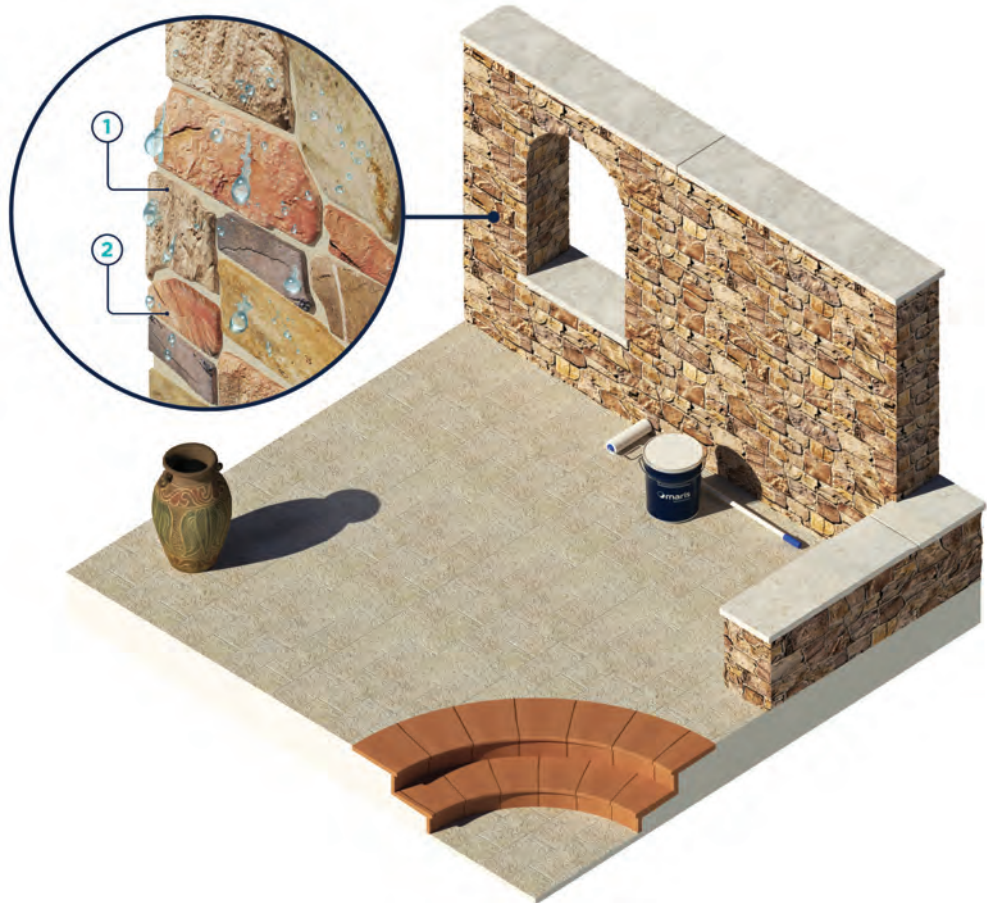



## VARNISHES

### MARIPUR® 7300

Transparent, glossy, semi-rigid, polyurethane sealer coating with high impact & abrasion strength and very good UV stability. Used as a transparent coating for natural stone sealing or as a transparent concrete sealer.  
**Certified** under EN 1504-2  
**Consumption:** 0,200-0,400 kg/m<sup>2</sup> in two layers

### MARISEAL® 7350

Transparent, glossy, semi-rigid, acrylic coating with impact & abrasion strength and very good UV stability. Used as a transparent coating for natural stone sealing or as a transparent concrete sealer.  
**Certified** under EN 1504-2  
**Consumption:** 0,300-0,400 kg/m<sup>2</sup> in two layers

### MARIPUR® 7500

Two-component, transparent, glossy, semi-rigid, polyurethane varnish with high impact & abrasion strength and excellent UV stability, used for protection of decorative micro-cement.  
**Certified** under EN 1504-2  
**Consumption:** 0,200-0,240 kg/m<sup>2</sup> in two layers

### MARIPUR® 7600

Two-component, transparent, matt, semi-rigid, polyurethane varnish with high impact & abrasion strength and excellent UV stability, used for protection of decorative micro-cement.  
**Certified** under EN 1504-2  
**Consumption:** 0,200-0,240 kg/m<sup>2</sup> in two layers

### MARIPUR® 7700

Transparent, glossy, semi-rigid, polyurethane coating with high impact & abrasion strength and excellent UV stability. Mainly used in floor coating applications, either as a transparent, solvent based coating over polyurethane or epoxy coatings or as a transparent concrete sealer in offices, retail stores, show rooms, night clubs, restaurants, warehouses and production areas.  
**Certified** under EN 1504-2  
**Consumption:** 0,150-0,200 kg/m<sup>2</sup> in one layer

### MARIPUR® 7800

Transparent, matt satin, rigid, solvent-free polyurethane coating with high impact & abrasion strength, excellent UV stability and color retention. Used as a transparent top-coat for floor coating constructions in offices, retail stores, show rooms, night clubs, restaurants, etc.  
**Certified** under EN 1504-2  
**Consumption:** 0,150-0,200 kg/m<sup>2</sup> in one layer

## TABLE OF PRODUCTS

### MARISEAL® 250

One-component, permanent elastic, liquid applied, solvent-based polyurethane waterproofing membrane used on roofs, terraces, verandas, green roofs, old bitumen felts, asphalt felts, TPO, PP, EPDM & PVC membranes, old acrylic coatings and for protection of polyurethane foam insulation.

**Certified** for 25 years expected life span (EOTA) & EN 1504-2, EN 14891.

**Consumption:** 1,4-2,5 kg/m<sup>2</sup> applied in two or three layers

### MARISEAL® 400

One component, UV-stable, aliphatic, solvent-based polyurethane top coat, prolonging the life span of the waterproofing membrane, with high pedestrian traffic, glossy-stable color and non-chalking finish.

**Certified** for 25 years expected life span (EOTA) under MARISEAL 250 SYSTEM & EN 13813

**Consumption:** 0,120-0,250 kg/m<sup>2</sup> applied in one or two layers

### MARISEAL® AQUA PRIMER

Two-component, transparent, water-based epoxy primer. Used in waterproofing, sealing and floor coating applications on absorbent and non-absorbent surfaces.

**Certified** under EN 1504-2

**Consumption:** 0,100-0,200 kg/m<sup>2</sup> in one or two layers

### MARISEAL® 710

One-component, solvent-based, quick-drying, deep penetrating, transparent, polyurethane primer. Used on absorbent surfaces.

**Certified** under EN 1504-2

**Consumption:** 0,200 kg/m<sup>2</sup> in one layer

### MARISEAL® 250W

One-component, permanent elastic, liquid applied, water-based polyurethane waterproofing membrane used on roofs, terraces, verandas, concrete constructions and for the protection of polyurethane foam insulation

**Certified** for 25 years expected life span (EOTA) & EN 1504-2

**Consumption:** 1,4-2,8kg/m<sup>2</sup> applied in two or three layers

### MARISEAL® 400W

One-component, UV-stable, aliphatic, water-based polyurethane top coat, prolonging the life span of the water-based waterproofing membranes, with high pedestrian traffic, glossy-stable color and non-chalking finish.

**Certified** for 25 years expected life span (EOTA) under MARISEAL 250W SYSTEM

**Consumption:** 0,200-0,400 kg/m<sup>2</sup> applied in one or two layers

### MARISEAL® 710W

One-component, water-based, deep penetrating, transparent, quick-drying polyurethane primer. Used on absorbent surfaces.

**Certified** under EN 1504-2

**Consumption:** 0,200 kg/m<sup>2</sup> in one or two layers

### MARISEAL® 450

One-component, liquid-applied, flexible, aliphatic solvent-based polyurethane membrane, used for long-lasting waterproofing of balconies, terraces and verandas. It offers exceptional UV stability and resistance to mechanical exposure with high pedestrian traffic.

**Certified** under EN 1504-2 & EN 13813

**Consumption:** 1,4-2,5kg/m<sup>2</sup> applied in two or three layers

### MARISEAL® 460

One-component, liquid-applied, flexible, aliphatic solvent-based polyurethane membrane, used for long-lasting waterproofing of roofs. It offers exceptional UV stability and yellowing resistance.

Contains a special catalyst that gives fast curing and defect free membrane, even at thick layers. Resistant to frost.

**Certified** under EN 1504-2

**Consumption:** 1,4-2,5kg/m<sup>2</sup> applied in two or three layers

### MARITRANS®

One-component, transparent, hard-elastic, high-solids aliphatic solvent-based, polyurethane membrane, used for long-lasting waterproofing. This high-technology membrane is UV-stable, non-yellowing, weather stable, alkali and chemical resistant and even after ageing it remains transparent and elastic.

Protects and waterproofs damaged glass surfaces & mineral surfaces against water penetration, frost, smog and acid rain. Also used as a transparent binder resin for sand carpet floor coating applications, especially where flexibility and UV stability are required.

**Certified** under EN 1504-2

**Consumption:** 0,800- 1,2kg/m<sup>2</sup> applied in two or three layers

### MARITRANS® FINISH

One-component, satin-matte, transparent, semi-rigid, solvent-based polyurethane coating, used for matt finishing over MARITRANS® polyurethane coatings

**Certified** under EN 1504-2

**Consumption:** 0,100kg/m<sup>2</sup> applied in one layer

### MARITRANS® TILE PRIMER

One-component, satin-matte, transparent, solvent-based, one-component adhesion promoter that chemically activates ceramic and glass surfaces, providing excellent adhesion to the coating that follows.

**Certified** under EN 1504-2

**Consumption:** 0,050 - 0,080kg/m<sup>2</sup> applied in one or two layers

### MARISEAL® 270

One-component, liquid-applied, permanent elastic, solvent-based polyurethane membrane used for long-lasting waterproofing for under-tile applications of roofs and balconies.

**Certified** under EN 14891

**Consumption:** 1,2-1,5kg/m<sup>2</sup> applied in two or three layers

### MARISEAL® 270W

One-component, liquid-applied, highly permanent elastic, water-based modified polyurethane membrane, used for long-lasting waterproofing, for under-tile applications in wet areas.

**Certified** under EN 14891

**Consumption:** 1,8kg/m<sup>2</sup> applied in more than two layers

### MARISEAL 280W / MARISEAL 281W / MARISEAL 282W:

One component, liquid-applied, highly permanent elastic, cold applied and cold curing, water-based, hybrid polyurethane membranes, used for the long-lasting waterproofing of roofs.

**Certified** under EN 1504-2

**Consumption:** 1,0 - 1,5 kg/m<sup>2</sup> in two or three layers

## TABLE OF PRODUCTS

### **MARISEAL® 600**

Two-component, liquid-applied, highly permanent elastic, solvent-based polyurethane bitumen-extended membrane, used for long-lasting waterproofing of foundations and retaining walls.

**Certified** under EN 1504-2

**Consumption:** 1,2 - 2,0kg/m<sup>2</sup> applied in more than two layers

### **MARISEAL® 670**

One-component, liquid-applied, highly permanent elastic, solvent-based polyurethane bitumen-extended membrane, used for long-lasting waterproofing of foundations and retaining walls.

**Certified** under EN 1504-2 & EN 14891

**Consumption:** 1,4 - 2,0kg/m<sup>2</sup> applied in two or three layers

### **MARISEAL® 420**

One-component, pigmented, semi-rigid, color/UV/ weather-stable, solvent-based polyurethane coating, used for the protection over exposed waterproofing membranes, subject to high wear and heavy traffic conditions.

**Certified** under EN 13813

**Consumption:** 0,400 - 0,600kg/m<sup>2</sup> applied in two layers

### **MARIPOOL®**

One-component, colored, chemical & abrasion resistant, thin-layer protective pool coating. Resistant to usual pool chemicals, UV & weather-stable, suitable also for exterior pools.

Used also in fountains, ponds and water channels.

**Certified** under EN 1504-2

**Consumption:** 0,150 kg/m<sup>2</sup> per layer, applied in 3 layers

### **MARISEAL® 300**

Two-component, liquid-applied, hard-elastic, solvent-free polyurethane membrane, used for long-lasting waterproofing and protection on drinking water tanks and reservoirs (fully reinforced), drinking water supply channels (fully reinforced), drinking water pipes and also under-tile on swimming pools.

**Certified** under EN 1504-2

**Consumption:** 2,0- 2,5 kg/m<sup>2</sup> applied in more than two layers fully reinforced

### **MARISEAL® 750**

Two-component, transparent, rigid, epoxy (low solvent) primer, used in high impact floor coating / waterproofing applications.

**Certified** under EN 1504-2

**Consumption:** 0,200 - 0,300kg/m<sup>2</sup> applied in one layer

### **MARISEAL® 800**

One-component, transparent, deep penetrating, non-staining, non-yellowing, non-film-making, siloxane/silane, water repellent used on façades and walls. It will prevent water penetration and protect surface from ultraviolet degradation, airborne dirt, smog, industrial fumes, acid rain, chloride ions and stabilize the surface.

**Certified** under EN 1504-2

**Consumption:** 0,200 - 0,300kg/m<sup>2</sup> applied in one or two layers (flood coats)

### **MARISEAL® 800 PLUS**

One-component, transparent, deep penetrating, non-staining, non-yellowing, non-film-making, siloxane/silane, nanotechnology-based, water & oil repellent used on façades and walls. It will prevent water penetration and protect surface from ultraviolet degradation, airborne dirt, smog, industrial fumes, acid rain, chloride ions and stabilize the surface.

**Certified** under EN 1504-2

**Consumption:** 0,300kg/m<sup>2</sup> applied in one layer (flood coat)

### **MARIPOX® 2600**

Two-component, self-levelling, rigid, solvent-free, epoxy coating with high impact & abrasion strength and very good resistance to acidic and basic solutions. Mainly used in heavy-duty industrial floor applications.

**Certified** under EN 13813

**Consumption:** Self-leveling coating: for 1mm thick layer, 0,800 kg/m<sup>2</sup> of MARIPOX® 2600 + 0,800 kg/m<sup>2</sup> of oven-dry silica sand (0,1-0,3mm) is needed. A minimum of 2mm coating thickness is recommended. Thin-layer coating (paint): 0,500-0,800 kg/m<sup>2</sup> of MARIPOX® 2600 is needed

### **MARIPOX® 2510**

Two-component, transparent, rigid, epoxy, solvent-free, flooring primer, for polyurethane and epoxy floor coatings on absorbent and non-absorbent surfaces.

**Certified** under EN 13813

**Consumption:** 0,200 - 0,300 kg/m<sup>2</sup> applied in one layer

### **MARICOAT® 2000**

Two-component, self-levelling, hard-elastic, polyurethane coating, with high impact resistance, abrasion strength and very good resistance to acidic and basic solutions. Mainly used in medium duty floor coating. Used in offices, show rooms, interior sports floors, warehouses, etc.

**Certified** under EN 13813

**Consumption:** 2,0 - 4,0 kg/m<sup>2</sup>, depending on the coating thickness required

### **MARIPUR® 7100**

One-component, colored, highly durable, heavy duty polyurethane floor coating, mainly used on concrete floors, on interior surfaces. Specially designed for use as a thin-layer floor coating, providing high mechanical strength. Used on car parking areas, storage rooms, warehouses, animal breeding farms, cold storage rooms (freezers), etc.

**Certified** under EN 13813

**Consumption:** 0,300 - 0,400 kg/m<sup>2</sup> applied in two layers

### **MARIPUR® 7200**

One-component, colored, highly durable, UV-stable, heavy-duty aliphatic polyurethane thin-layer floor coating, specially designed for use on external surfaces. Used on car parking areas, external and internal pedestrian decks, storage rooms, warehouses, etc.

**Certified** under EN 13813

**Consumption:** 0,400 kg/m<sup>2</sup> applied in two layers


### **MARIPUR® 7000**

One-component, transparent, semi-rigid, deep penetrating, polyurethane primer, used for polyurethane floor coatings on absorbent surfaces.

**Certified** under EN 1504-2

**Consumption:** 0,200 kg/m<sup>2</sup> applied in one layer

## APPLICATION STEPS OF MARISEAL SYSTEM

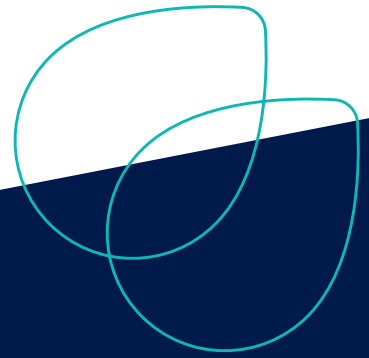

**STEP 1**  
Preparation of the surface



**STEP 2**  
Primer



**STEP 3**  
Fixing cracks and joints



**STEP 4**  
Details and corners



**STEP 5**  
Wall-floor connection



**STEP 6**  
Reinforcement 1st layer of waterproofing membrane



**STEP 7**  
2nd layer of waterproofing membrane



**STEP 8**  
Topcoat



**STEP 9**  
Final outcome



**MARIS**

Industrial Area of Inofita  
32011 • Inofita  
Greece  
Tel.: + 30 22620 32918-9  
[www.marispolymers.com](http://www.marispolymers.com)